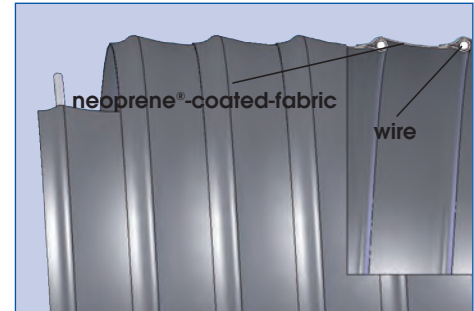


FLEXAUST® CWY-S

Very flexible, single-ply Neoprene® ducting

**Material:**

Neoprene®-coated-polyester fabric.

Colour:

Black.

Single Length:

10 and 15 m.

Temperature Resistance:

- 55° up to + 120° C.

Applications:

Suction and conveyance of air,
fumes and gases,
Air-conditioning and ventilation.

Properties:

Flame retardant,
excellent UV-resistance,
rot-proof,
maintains flexibility at low temperatures,
good chemical resistance.

Special Constructions:

CWY-S-NH – polyamide helix.

TECHNICAL DATA

6.2

Dia. mm	Weight kg/m	Mat. Thickness mm	Bend. Rad. mm	Max. Work. Press. bar	Max. Vacuum bar
50	0,30	0,40	50	0,80	0,20
60	0,36	0,40	60	0,80	0,16
70	0,42	0,40	70	0,70	0,14
75	0,45	0,40	75	0,60	0,10
80	0,50	0,40	80	0,60	0,09
100	0,57	0,40	100	0,50	0,08
120	0,68	0,40	120	0,50	0,08
125	0,71	0,40	125	0,50	0,07
140	0,79	0,40	140	0,30	0,06
150	1,01	0,40	150	0,20	0,06
175	1,18	0,40	175	0,20	0,05
200	1,20	0,40	200	0,20	0,04
250	1,25	0,40	250	0,15	0,03
300	1,39	0,40	300	0,10	0,02
350	2,77	0,40	350	0,06	0,02
400	3,16	0,40	400	0,04	0,01
450	3,56	0,40	450	0,03	0,01
500	3,96	0,40	500	0,03	0,01
600	4,75	0,40	600	0,01	0,01

Further diameters available upon request.

Technical data are based on + 20° C.



SCHAUBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · P.O. Box 101854 · 45478 Mülheim-Ruhr · Germany · Tel. (02 08) 99 91-0 · Fax (02 08) 5 33 74