
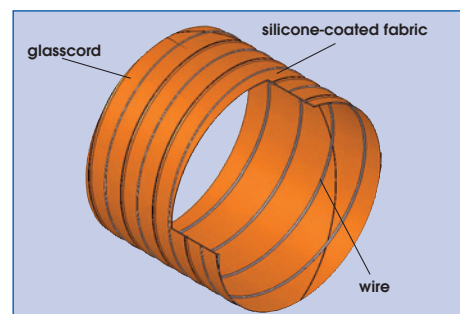


# FLEXADUX® P 4 E

## Light weight, single-ply Silicone ducting

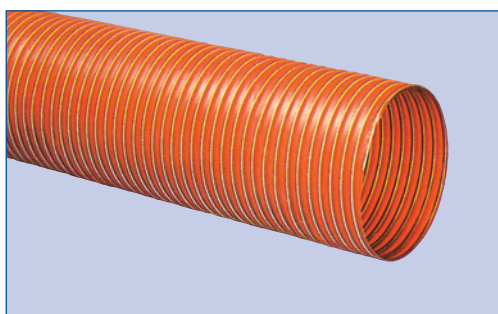

### Material:

Silicone-coated-glassfabric, single-ply.

### Colour:

Red-brown.

### Single Length:

4 m;  
Special lengths available on request.

### Temperature Resistance:

- 70°C up to + 250°C,  
(interm. up to + 300°C).

### Applications:

Suction of air and gases in paper processing, plastic industry and vehicle construction.

### Properties:

Excellent heat resistance,  
maintains flexibility at low temperatures,  
very good chemical resistance.

### Available on request:

- with spiralfree cuffs
- with PA- fabric.

## TECHNICAL DATA

## 8.1

Dia. mm	Weight kg/m	Mat. Thickness mm	Bend. Rad. mm	Max. Work. Press. bar	Max. Vacuum bar
19	0,11	0,20	8	1,60	0,51
25	0,12	0,20	8	1,60	0,51
32	0,14	0,20	10	1,40	0,50
38	0,17	0,20	12	1,30	0,50
44	0,21	0,20	14	1,20	0,46
51	0,25	0,20	16	1,20	0,43
57	0,27	0,20	18	1,10	0,42
63	0,32	0,20	22	1,10	0,39
70	0,36	0,20	24	1,10	0,36
76	0,41	0,20	27	1,10	0,34
83	0,46	0,20	28	1,00	0,31
89	0,49	0,20	29	1,00	0,30
95	0,56	0,20	32	0,90	0,28
102	0,65	0,20	35	0,90	0,26
121	0,76	0,20	43	0,80	0,20
127	0,80	0,20	46	0,80	0,17
140	0,90	0,20	48	0,70	0,15
152	0,99	0,20	51	0,70	0,14
178	1,19	0,20	60	0,60	0,11
203	1,33	0,20	68	0,50	0,07
254	1,68	0,20	102	0,40	0,04
305	2,05	0,20	123	0,20	0,02

Further diameters available upon request.

Technical data are based on + 20° C.



**SCHAENBURG RUHRKUNSTSTOFF GMBH**

Weseler Str. 35 · P.O. Box 10 18 54 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 208 99 91-0 · Fax +49 (0) 208 5 33 74