


809AA  
 FLEXOR 13 MSHA  
 SAE 100 R13 - EN 856 R13

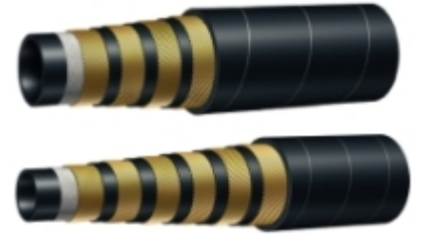

Tube : OIL RESISTANT SYNTHETIC RUBBER  
 Reinforcement : FOUR/SIX HIGH TENSILE STEEL SPIRALS (4S/ 6S)  
 Cover : ABRASION, OZONE AND HYDROCARBON RESISTANT SYNTHETIC RUBBER  
 Application : VERY HIGH PRESSURE HYDRAULIC LINES, FUEL OIL, ANTIFREEZE SOLUTIONS, AIR AND WATER.  
 Constant operation : -40°C +121°C  
 Ambient temperature : -40°C +80°C  
 Fittings : Consult fittings catalogue  
 Length : Random up to 1" - 40 m max over 1"  
 Branding : ALFAGOMMA FLEXOR 13 DN ... - ID ... - WP ... BAR - ... PSI - USMSHA IC-152/8 - MADE IN ITALY - Q/yr  
 Note : S.F.: 4:1

Code	Constr.	ID mm	ID in	Dash	OD mm	OD in	WP Mpa	WP psi	BP Mpa	BP psi	BR mm	BR in	Weight kg/m	Weight lb/C ft
<u>809AA02000ARB8</u>	4S	19	3/4	-12	32,1	1,26	35	5000	140	20000	241	9,6	1,6	107
<u>809AA02500ARB8</u>	4S	25	1	-16	38,7	1,52	38	5500	152	22000	305	12,2	2	134
<u>809AA03200ARB8</u>	6S	32	1.1/4	-20	49,8	1,96	35	5000	140	20000	419	16,8	3,6	241
<u>809AA03800ARB8</u>	6S	38	1.1/2	-24	57,3	2,26	35	5000	140	20000	508	20,3	4,8	322
<u>809AA05100ARB8</u>	6S	51	2	-32	70,9	2,79	35	5000	140	20000	635	25,4	6,6	442