


T-509 OE
ACID-CHEMICAL S&D 16 BAR (240 PSI) - UHMWPE
FDA

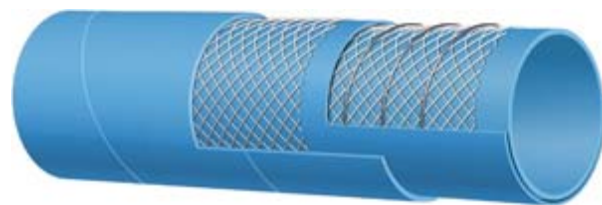

TUBE : TRANSPARENT UHMWPE (ULTRA HIGH MOLECULAR WEIGHT POLYETHYLENE)

REINFORCEMENT : HIGH TENSILE TEXTILE CORDS WITH EMBEDDED STEEL HELIX WIRE

COVER : BLUE EPDM - ABRASION AND OZONE RESISTANT

APPLICATION : ACID AND CHEMICAL SUCTION AND DELIVERY. SUITABLE FOR 98% OF EXISTING CHEMICALS. REFER TO CHEMICAL RESISTANCE CHART.

SAFETY FACTOR : 3:1

TEMPERATURE : -20°C +65°C (-4°F +150°F)

BRAND TEXT : ALFAGOMMA -ITALY- T-509 16 BAR (240 PSI) UHMWPE CHEMICAL - S&D -(logo)

BRAND TYPE : ORANGE LETTERS

APPROVALS :

NOTE :

Code	ID mm	ID inch	OD mm	Wall mm	Weight g/m	WP bar	WP psi	Vac. %	BR mm	Available Length m	Stock Length m
<u>509OE0193155R0</u>	19	3/4	31	6	590	16	240	90	188	30,5	30,5
<u>509OE0253755R0</u>	25	1"	37	6	730	16	240	90	225	30,5	30,5
<u>509OE0324455R0</u>	32	1" 1/4	44	6	870	16	240	90	263	30,5	30,5
<u>509OE0385055R0</u>	38	1" 1/2	50	6	1010	16	240	90	338	30,5	30,5
<u>509OE0405255R0</u>	40	1" 9/16	52	6	1050	16	240	90	338	30,5	
<u>509OE0516355R0</u>	51	2"	63	6	1330	16	240	90	413	30,5	30,5
<u>509OE0637755R0</u>	63	2" 1/2	77	7	2080	16	240	90	450	30,5	
<u>509OE0769255R0</u>	76	3"	92	8	2820	16	240	80	525	30,5	
<u>509OE1021855R0</u>	102	4"	118	8	3850	16	240	80	675	30,5	30,5